


Sanicondens Pro



4.5 m
50 m



PRODUCT FEATURES & BENEFITS

- Compact and quiet solution
- Suitable for use with gas and oil boilers (using Sanineutral or Sanineutral Mini), floor and wall mounted boilers, refrigerated display cabinets, air conditioning units and dehumidifiers
- Easy installation: fixing kit supplied

CONNECTIONS

← Discharge diameter (int.): 10 mm


→ Inlet diameter DN: 28 mm



PACK CONTAINS

Sanicondens Pro, non-return valve included, fixing screw, 1 inlet adapter, 1 outlet adapter (Ø 50 mm), 1 discharge hose (5 m), 1 power cable (1.5 m), 1 rubber stopper, 1 alarm pre-connection cable

CURVE

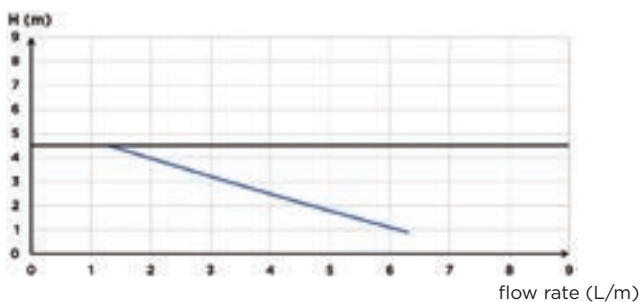

— Recommended max height: 4.5 m

TECHNICAL FEATURES

Max. power of boiler	Oil 30, Gas 50 kW
Number of inlets	2
Inlet diameter DN	28 mm
Discharge diameter (int.)	10 mm
Tank volume	2.2 L
Max. incoming temperature	80°C (S3 15%)
Voltage / Frequency	220-240 V / 50-60 Hz
Max. power consumption	60 W
Maximum current	0.52 A
IP Rating	IP24
Electrical class	I
Noise level	< 45 dB(A)
Identification and logistics	
Gross weight	3 kg
Barcode	3308815083674
Product code	1140

DIMENSIONS

